China



Extruded Antistatic Cast MC Nylon Rod PA6 CF30 Rod Blue

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
 - Packaging Details:
 - Delivery Time:
 - Payment Terms:
 - Supply Ability:

| MAKEWELL |
|---|
| ISO9001 Rohs, Reach |
| Nylon PA6 CF30 sheet rod |
| 10kg |
| 35- 55/kg |
| Pallet |
| 7-15 days |
| L/C, D/A, D/P, T/T, Western Union, MoneyGram |
| 10000000 kg /month |




Product Specification

| Color: | NC/BLACK |
|---|---|
| • Size: | 15-100mm Diameter |
| Quality: | High Quality |
| Delivery Time: | 7-15 Days |
| Advantage: | Good Mechanical Properties And Rigidity |
| • Surface: | High Surface Hardness |
| Plastic Modling Type: | Extruding,Mould |
| • Type: | Sheet, Rod, Tube |
| Packing: | Wooden Box,Wooden Case |
| • Tolerance: | As Drawing |
| Service: | OEM/ODM As Your Sketch,idea Or Samples,OEM Service |
| • Item: | Custom Cnc Machining Engineering Plastic Products |
| Product Name: | Nylon PA6 CF30 |
| Cartification. | 1000001 000 Balla And Others Test Barant |



More Images

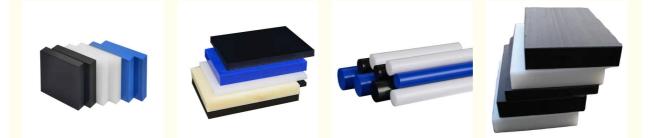

Product Description

PA6 - CF30 is a special added 30% carton fiber reinforced nylon material, the heat resistance, strength, stiffness and creep resistance and dimensional stability, abrasion resistance is better than that of pure material of nylon 6, maximum allowable working temperature is also higher.

Our size

PA6 / PA6 GF25

| Product | Thickness (mm) | Width (mm) | Length (mm) | Mark |
|----------------|----------------|------------|-------------|---------------------|
| PA6 plate | 6-12 | 540 | 540 | Thickness 2mm/step |
| PA6 plate | 15-70 | 540 | 540 | Thickness 5mm/step |
| PA6 plate | 80-170 | 540 | 540 | Thickness 10mm/step |
| PA6 plate | 110-200 | 640 | 640 | Thickness 10mm/step |
| PA6 plate | 6-12 | 1080 | 1080 | Thickness 2mm/step |
| PA6 plate | 15-70 | 1080 | 1080 | Thickness 5mm/step |
| PA6 plate | 80-120 | 1080 | 1080 | Thickness 10mm/step |
| PA6 plate | 6-12 | 1080 | 2180 | Thickness 2mm/step |
| PA6 plate | 15-70 | 1080 | 2180 | Thickness 5mm/step |
| Product | Thickness (mm) | Width (mm) | Length (mm) | Mark |
| PA6+GF25 plate | 6-12 | 630 | 1300 | Thickness 2mm/step |
| PA6+GF25 plate | 15-60 | 630 | 1300 | Thickness 5mm/step |
| PA6+GF25 plate | 70-110 | 630 | 1300 | Thickness 10mm/step |
| Product | Thickness (mm) | Width (mm) | Length (mm) | Mark |
| PA6+Mos2 plate | 5-8 | 1300 | 1250 | Thickness 2mm/step |
| PA6+Mos2 plate | 10-12 | 1300 | 1250 | Thickness 5mm/step |
| PA6+Mos2 plate | 30-300 | 1300 | 1250 | Thickness 10mm/step |
| Product | Diameter (mm) | Width (mm) | Length (mm) | Mark |
| PA6 rod | φ6 | - | 1000 | |
| PA6 rod | βφ | - | 1000 | |
| PA6 rod | φ10 | - | 1000 | |
| PA6 rod | φ12 | - | 1000 | |
| PA6 rod | φ15 | - | 1000 | |
| PA6 rod | φ18 | - | 1000 | |
| PA6 rod | φ20 | - | 1000 | |
| PA6 rod | φ25 | - | 1000 | |
| PA6 rod | φ28 | - | 1000 | |
| PA6 rod | φ30-100 | - | 1000 | Diameter 5mm/step |
| PA6 rod | φ110-400 | - | 1000 | Diameter 10mm/step |
| Product | Diameter (mm) | Width (mm) | Length (mm) | Mark |
| PA6+GF25 rod | φ20-100 | - | 1000 | Diameter 5mm/step |
| PA6+GF25 rod | φ110-4000 | - | 1000 | Diameter 10mm/step |
| Product | Diameter (mm) | Width (mm) | Length (mm) | Mark |
| PA6+GF25 rod | φ20-25 | - | 1000 | Diameter 5mm/step |
| PA6+GF25 rod | φ30-50 | - | 1000 | Diameter 10mm/step |
| PA6+GF25 rod | φ60-300 | _ | 1000 | Diameter 10mm/step |

Detailed Photos















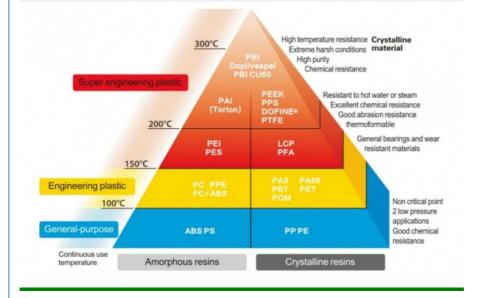



Our Exhibition



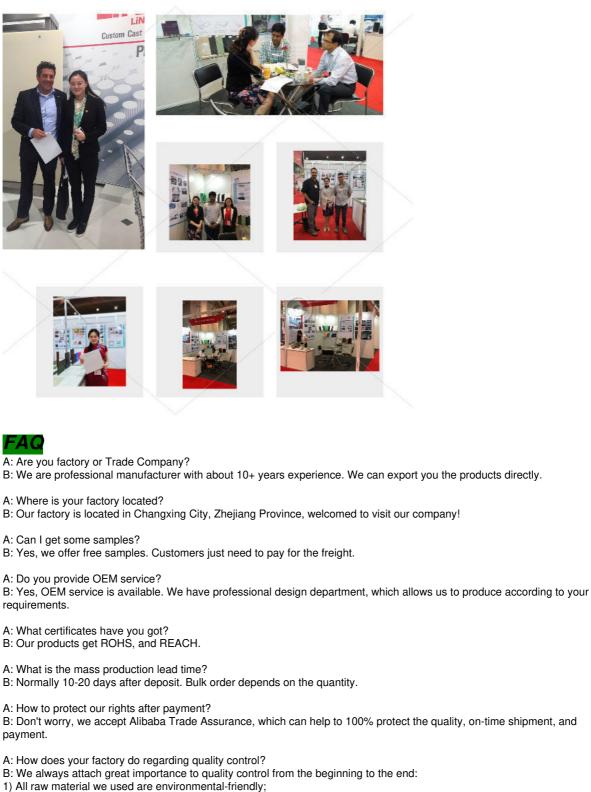

- 2) Skilful workers care every detail in handling the producing and packing process.
- Quality control department especially responsible for quality checking in each process.

